

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Жабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://hiref.nt-rt.ru> || hfb@nt-rt.ru

DATA CENTER



Chilled water perimeter mounted air conditioners

TRF CS

for Data Center with underfloor fans - Slim Edition

Range: 58.2-242.4 kW



TRF CS is the range of chilled-water air conditioners **for high power density computer rooms**. The fans of the TRF CS units are positioned in separate housing (so-called FREE FAN solution), **to increase the overall cooling capacity of the unit**, but not to the detriment of the depth, which remains 890 mm. Great care has gone into every detail, in order **to minimize air flow pressure drops and energy consumption of the fans**, the only electrical load present in the machine.

Main Advantages

FREE FAN solution

The FREE FAN solution with the fans mounted in separate housing frees up space inside the unit and thus increases the surface area of the coil. This results in both an increase in air flow and cooling capacity and a reduction in air pressure drops. The FREE FAN solution increases the refrigerating power of the entire range.



Ventilation EC 2.0

EC PLUG fans, standard throughout the range, are adjustable using different logics: flow rate, overpressure, constant ΔP and ΔT . Their accurate adjustment allows an efficient use of power for ventilation and a consequent reduction of the system's PUE. Extended range speed adjustment is carried out via Modbus protocol. The "emergency speed" function allows for fan operation even in the event of microprocessor malfunctions.

Double circuit

Chilled water units are also available with a double circuit. In this version the supply is via two different hydraulic circuits that can offer the utmost operational continuity if one of the two circuits malfunctions. Each circuit is equipped with a regulating valve



Ventilation adjustment

Depending on the air distribution logic in the server room, it is possible to adjust the machine on-board ventilation system to ensure a constant air flow rate (airflow control) or a constant available overpressure (ΔP control). The latter is particularly useful if a floating floor is used.

Accurate regulation with multiple types of valves

All units in the TRF CS range have as standard regulating valves fitted with 0-10V servo motor, selectable in 2-way execution, with variable or 3-way flow system or with servo motor with spring return. Pressure-independent valves can also be fitted on request. All these types of valves ensure the utmost adjustment accuracy while maintaining the system's hydronic balance.



Finned pack coil with hydrophilic coating

All models in the TRF CS range feature heat exchange coils with hydrophilic coating. This special coating - together with adequate adjustment of air through-flow speeds - helps condensate collection and outflow during the dehumidification process, preventing any dripping on the inside and outside of the unit.

Easier scheduled maintenance

The unit has been painstakingly designed to ensure frontal access to components. This makes routine maintenance easier in full compliance with safety standards.

Extended filter section

Air filters, located on the entire surface of the coil, maximize the filtering section and minimize the unit's air pressure drops.



Technological components




Multi-protocol communication interface

HiRef units can be integrated with the customer's external supervision Building Management System (BMS), using the most popular communication protocols, including Modbus RTU, Modbus/IP, BacNet, LonWorks, SNMP.



EC Radial Fans

Radial or centrifugal fans are characterised by backward blades. Air is taken in the axial direction, parallel to the rotation axis and delivered radially, perpendicular to the rotation axis. This type of fan does not require an external screw, has a high head and is suitable for use in indoor units where the air is often ducted and recirculated. They are driven by electronically commutated (EC) brushless permanent-magnet (BLDC) synchronous motors. The use of these motors reduces unit consumption, noise and footprint, improves the efficiency and life cycle of the system through accurate control of speed and acceleration, resulting in less heat dissipation. In addition, inrush currents and sparks are eliminated.



Modbus controlled fans

The Modbus protocol, unlike the 0-10V signal, allows to not only control the speed of the fans, but also to capture, monitor and manage considerably more data and alarm information.



Pressure independent valve (PICV)

The pressure independent valve (PICV) controls the automatic flow balance. Traditional valves are affected by the pressure in the system, causing variable flow rate circulation in the unit. When the system pressure changes, for example due to the shutdown or start-up of other units, the compensation system of this independent valve helps to keep the water flow constant and to always guarantee unit operation in the agreed project conditions.



Fast restart

The fast restart function (on request) allows the unit to restart quickly after a mains power outage. This optional feature is available with dual power to minimise restart times.



On-board Humidifier

Humidifiers are essential components for maintaining the right level of humidity in the server room and ensuring the proper functioning of the room equipment. Humidifiers with immersed electrodes can be installed in HiRef units, managed by proprietary software which, equipped with a special probe, keeps humidity levels at pre-established values.



Variable geometry coil (Flexy)

Chilled water units can be selected based on the room working conditions. HiRef has designed three configurations of the heat exchange coils, each suitable for operation in commonly found operating conditions:

- **A:** Solution for systems with low ΔT ($\approx 5^{\circ}\text{C}$) and high water flow rates
- **B:** Solution for systems with moderate ΔT ($\approx 8^{\circ}\text{C}$) and average water flow rates
- **C:** Solution for systems with high ΔT ($\approx 12^{\circ}\text{C}$) and low water flow rates



Double circuit

The chilled water units are also available in a double circuit version, fed from two different independent hydraulic circuits, able to offer maximum redundancy in case one of them should go out of service. Each circuit is equipped with its own regulating valve.


Air flow configurations



Types of system



CHILLED WATER

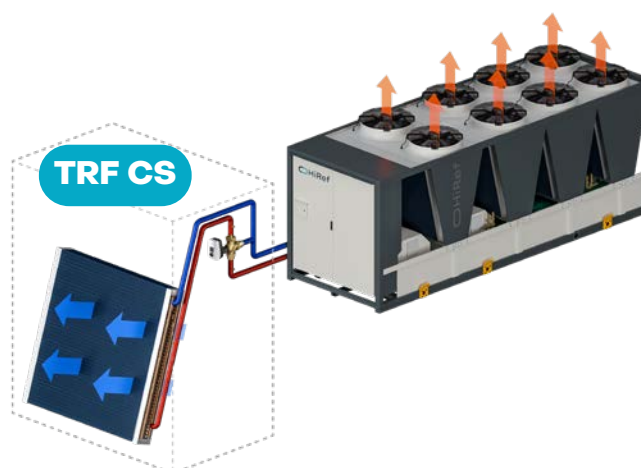

Additional benefits

- Temperature control through heating and post-heating systems with electric heating elements
- Humidity control through dehumidification and humidification
- Humidifier installed on board the machine
- Fan speed modulation based on thermal load (constant ΔT)
- Hydraulic connections from the bottom of the unit
- Broad choice of accessories, including plenums for ducting, plenums for direct Free-Cooling
- Air filter class G3 supplied as standard Air Filters G4, M5, F7
- Double power supply with automatic switch
- Double panelling only on the front doors or on the whole machine
- Instant reading of water flow rate, water inlet and outlet temperatures, or cooling capacity

Technical table

TRF CS		045	055	065	075	150	180	200	210
VERSION A · AIR TEMPERATURE 24°C - RELATIVE HUMIDITY 50% / WATER TEMPERATURE IN 7°C OUT 12°C									
COOLING CAPACITY	kW	68.9	81.8	104.7	131.2	165.3	200.5	-	-
SHR	-	0.82	0.8	0.82	0.78	0.8	0.78	-	-
EER	-	26.92	29.21	31.38	35.17	35.68	38.28	-	-
VERSION A · AIR TEMPERATURE 30°C - RELATIVE HUMIDITY 35% / WATER TEMPERATURE IN 10°C OUT 15°C									
COOLING CAPACITY	kW	72.6	84.8	110.2	131.2	172.3	200.6	-	-
SHR	-	1	1	1	0.99	1	0.99	-	-
EER	-	28.35	30.26	33.05	35.19	37.19	38.29	-	-
VERSION A · AIR TEMPERATURE 35°C - RELATIVE HUMIDITY 30% / WATER TEMPERATURE IN 15°C OUT 20°C									
COOLING CAPACITY	kW	72.9	84.9	110.8	130.2	173	199	-	-
SHR	-	1	1	1	1	1	1	-	-
EER	-	28.49	30.3	33.21	34.91	37.35	37.98	-	-
VERSION B · AIR TEMPERATURE 30°C - RELATIVE HUMIDITY 35% / WATER TEMPERATURE IN 10°C OUT 18°C									
COOLING CAPACITY	kW	66	79.9	102.8	121.4	157.2	189.4	205.2	242.4
SHR	-	1	1	1	1	1	1	1	1
EER	-	25.81	28.53	30.82	32.56	33.93	36.15	29.64	31.42
VERSION B · AIR TEMPERATURE 35°C - RELATIVE HUMIDITY 30% / WATER TEMPERATURE IN 15°C OUT 23°C									
COOLING CAPACITY	kW	67.8	79.7	103	121.2	157.4	188.9	205.5	241.8
SHR	-	1	1	1	1	1	1	1	1
EER	-	26.48	28.47	30.87	32.49	33.98	36.05	29.69	31.35
VERSION C · AIR TEMPERATURE 30°C - RELATIVE HUMIDITY 35% / WATER TEMPERATURE IN 10°C OUT 22°C									
COOLING CAPACITY	kW	58.2	70.6	88.4	109.7	135.1	167.7	176.4	218.9
SHR	-	1	1	1	1	1	1	1	1
EER	-	22.73	25.2	26.5	29.41	29.17	32	25.48	28.38
VERSION C · AIR TEMPERATURE 35°C - RELATIVE HUMIDITY 30% / WATER TEMPERATURE IN 15°C OUT 27°C									
COOLING CAPACITY	kW	58.8	71	89.3	110.2	136.5	168.5	178.2	220
SHR	-	1	1	1	1	1	1	1	1
EER	-	22.97	25.33	26.77	29.55	29.47	32.16	25.75	28.52
AIR FLOW	m³/h	15500			23550		36000		47000
FANS ABSORBED POWER	kW	2.6	2.8	3.3	3.7	4.6	5.2	6.9	7.7
POWER SUPPLY	-	400/3+N/50							
SOUND PRESSURE LEVEL at 2 meters free field	dB	69		66	67	68		69	70
DIMENSIONS [LxHxD]	mm	1270x2000x890			1760x2000x890		2510x2000x890		3160x2000x890

Also available with 60 Hz power supply. | Minimum height with fanmodule 2550 mm.

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Орел (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://hiref.nt-rt.ru> || hfb@nt-rt.ru