

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Жабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://hiref.nt-rt.ru> || [hfb@nt-rt.ru](mailto:hfb@nt-rt.ru)

NRG W

 **HiRef**  
Innovators above  
the standards

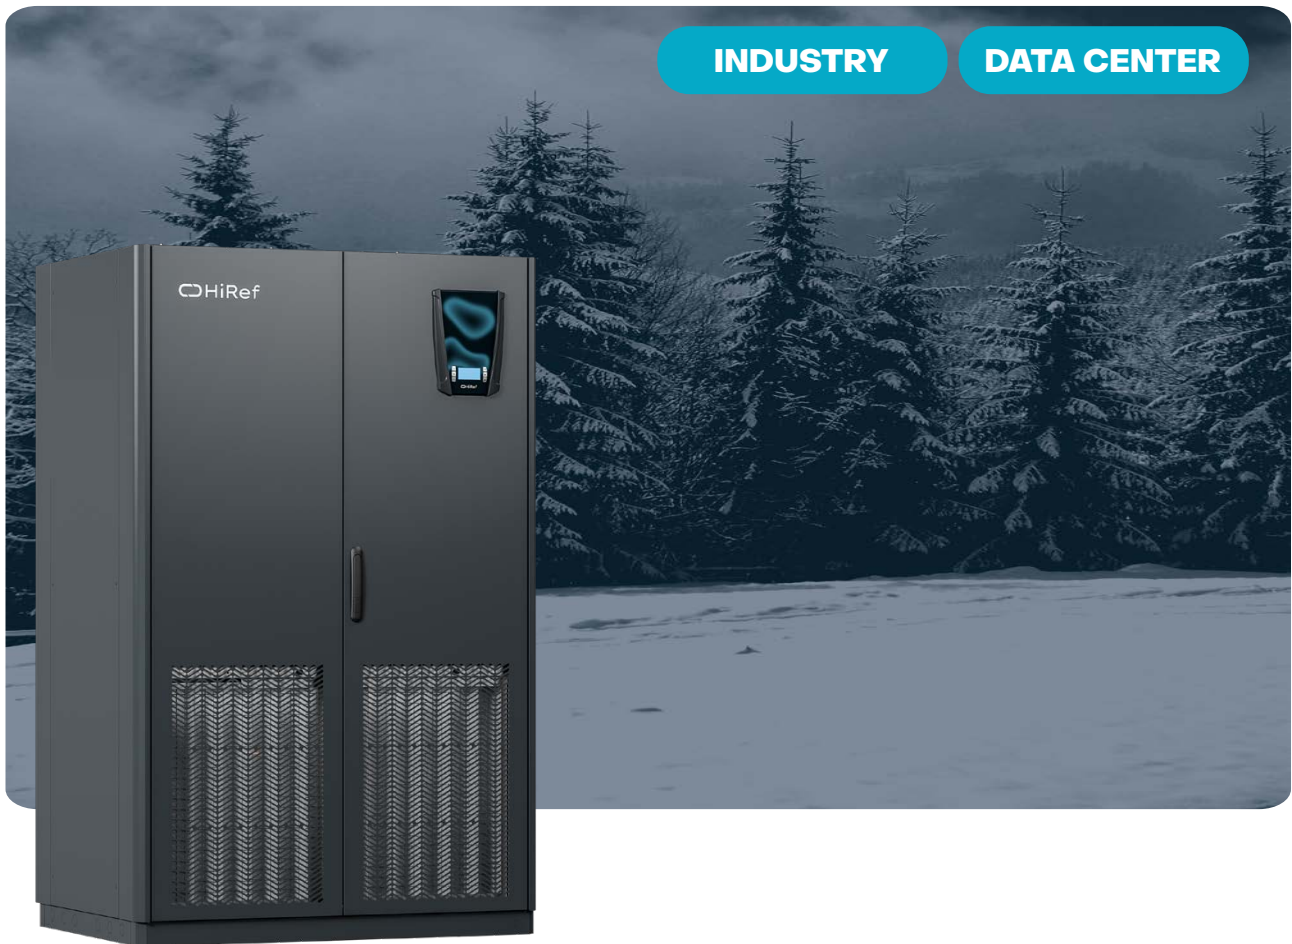

**Water condensed perimeter mounted units**

**NRG W**

**for Data Centers with modulating compressors**

Range: 8.8–112.1 kW





The NRG W units are water-condensed perimeter cabinets. The W series uses Dry Cooler water, the Z series on the other hand uses low temperature mains water or groundwater (15°C). The NRG units of these series are monobloc units inside which the **entire cooling circuit is concentrated**, cooling is via a **brazed plate exchanger made from stainless steel AISI 304**.

## Main advantages

### Power modulation

The NRG W units adapt quickly to Data Center cooling requests. Thanks to the inverter-controlled compressor, performance can be modulated to up to 25% of the rated value, thus reducing consumption. This ensures continuous operation of the unit even at low loads, without switching cycles on and off.

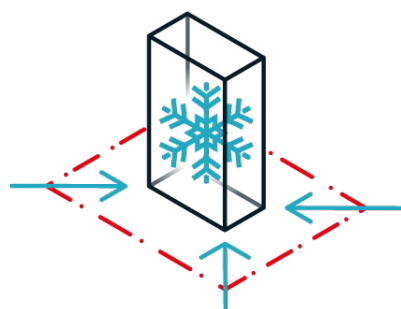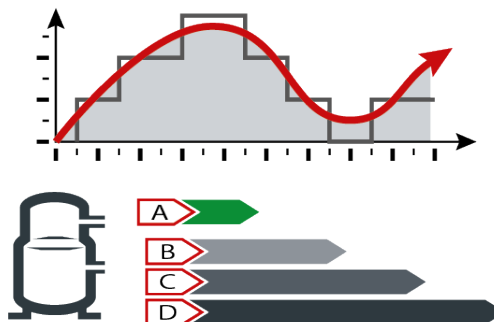

### Maximised power density

The internal design and the special arrangement of the components of the TRF Evolution platform, used in the NRG units, have been designed to maximise the exchange surface of the evaporating coil. These characteristics, combined with the use of latest-generation electronic switching EC fans with high air flow rate, have allowed the power density to be increased. The space available in the server room is made the most of and this makes the NRG W/Z units suitable for applications with high thermal load density, typical of latest generation Data Centres.

### Aiming at maximised system efficiency

Design choices include, in addition to the use of electronically controlled expansion valves, the management of variable-speed scroll compressors and EC (electronically commutated) fans via Modbus. Thanks to these features it is possible to acquire, manage and adjust operating parameters and therefore thermo-hygrometric values in the server room very accurately, with high levels of energy efficiency.



## Technological components



### Multi-protocol communication interface

HiRef units can be integrated with the customer's external supervision Building Management System (BMS), using the most popular communication protocols, including Modbus RTU, Modbus/IP, BacNet, LonWorks, SNMP.




### Scroll compressors

Scroll compressors include a mobile scroll, driven by the motor, which completes orbital revolutions and a fixed scroll that is coupled to it. The orbital motion creates a series of gas pockets that move from one scroll to the other. When moving closer to the centre of the scroll, where exhaust takes place, the gas is compressed to smaller and smaller volumes until the desired delivery pressure is reached. Scroll technology improves volumetric efficiency and flow continuity, reduces noise and leakage and eliminates harmful volumes and downtime.



### EC Radial Fans

Radial or centrifugal fans are characterised by backward blades. Air is taken in the axial direction, parallel to the rotation axis and delivered radially, perpendicular to the rotation axis. This type of fan does not require an external screw, has a high head and is suitable for use in indoor units where the air is often ducted and recirculated. They are driven by electronically commutated (EC) brushless permanent-magnet (BLDC) synchronous motors. The use of these motors reduces unit consumption, noise and footprint, improves the efficiency and life cycle of the system through accurate control of speed and acceleration, resulting in less heat dissipation. In addition, inrush currents and sparks are eliminated.



### Modbus controlled fans

The Modbus protocol, unlike the 0-10V signal, allows to not only control the speed of the fans, but also to capture, monitor and manage considerably more data and alarm information.



### Fast restart

The fast restart function (on request) allows the unit to restart quickly after a mains power outage. This optional feature is available with dual power to minimise restart times.



### On-board Humidifier

Humidifiers are essential components for maintaining the right level of humidity in the server room and ensuring the proper functioning of the room equipment. Humidifiers with immersed electrodes can be installed in HiRef units, managed by proprietary software which, equipped with a special probe, keeps humidity levels at pre-established values.




### Modulating hot gas post-heating

Post-heating by modulating hot gas controls the air temperature through the action of an additional coil, powered by the gas delivered by the compressor and partially bypassed by the condenser towards the coil. Unlike the On/Off version, the flow of hot gas is controlled by a diverter valve, which accurately regulates the flow rate required for post-heating. This option is only available for direct expansion units.



### Inverter driven compressors


Inverter-driven compressors allow compressor rotation speed and efficiency to be controlled, by modulating the frequency and the supply voltage of the motor. They are driven by electronically commutated (EC) brushless permanent-magnet (BLDC) synchronous motors. The use of these motors reduces unit consumption, noise and footprint, improves the efficiency and life cycle of the system through accurate control of speed and acceleration, resulting in less heat dissipation. In addition, inrush currents and sparks are eliminated.



### Plate heat exchanger

Brazed plate heat exchangers ensure efficient heat transfer with minimised footprint, eliminate the need for thick frame plates and seals, and ensure high thermal power density. They have a long life cycle, are maintenance-free and withstand both high temperatures and extremely high pressures. This type of exchanger is used in a wide range of applications including cooling, heating, evaporation and condensation.

## Air flow configurations

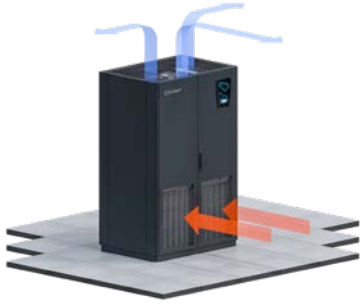

Upflow



Downflow




Displacement

## Types of system



AIR/WATER

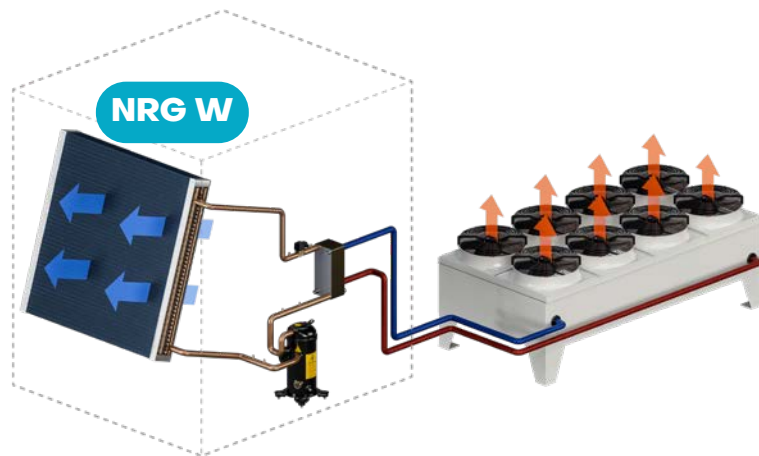

## Additional benefits

- Refrigerant R410A
- EC Fans
- Scroll inverter and on-off compressors
- Electronic expansion valves
- Advanced programmable microprocessor control with LCD display
- Air filter class G3 supplied as standard Air Filters G4, M5, F7
- Temperature control through heating and post-heating systems with electric heating elements, hot water and hot gas
- Broad choice of accessories including basic modules, plenums for ducting, plenums for direct Free-Cooling
- Double power supply with automatic switch
- Humidity control through dehumidification and humidification
- Constant flow (airflow control) or constant available overpressure ( $\Delta P$  control) ventilation modulation
- Low temperature kits for optimal operation in the case of installation in particularly cold environments

## Technical table

NRG W		0091	0131	0201	0251	0301	0381	0441	0501	0551	0641	0701	0801	0852	0962
<b>AIR TEMPERATURE 24°C - RELATIVE HUMIDITY 50% / WATER 40°C - 45°C</b>															
<b>COOLING CAPACITY</b>	<b>kW</b>	8.8	11.9	20.4	24.5	32.1	37.1	44.1	46.3	54.3	56.3	71.3	74.8	82.8	90.1
<b>SHR</b>	-	0.85	0.95	1	1	1	0.98	0.91	0.98	0.91	0.98	0.93	0.99	0.99	0.93
<b>EER</b>	-	3.15	3.37	4.43	4.38	4.58	3.97	3.77	3.94	3.64	3.82	3.66	3.83	4.47	4.06
<b>TOTAL POWER INPUT</b>	<b>kW</b>	3	3.9	5.8	6.8	8.8	11.1	13.5	14	17.1	17.6	23.4	24.5	24.4	28.1
<b>AIR TEMPERATURE 30°C - RELATIVE HUMIDITY 35% / WATER 40°C - 45°C</b>															
<b>COOLING CAPACITY</b>	<b>kW</b>	9.5	13.5	23.6	28.2	36.9	42.4	49.3	52.9	60.5	64.1	79.8	85.6	95	101.5
<b>SHR</b>	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>EER</b>	-	3.34	3.77	5.26	5.14	5.35	4.56	4.2	4.47	4.05	4.35	4.05	4.32	5.18	4.58
<b>TOTAL POWER INPUT</b>	<b>kW</b>	3	4	5.7	6.7	8.7	11.1	13.5	14.1	17.2	17.6	23.6	24.7	24.2	28.1
<b>AIR TEMPERATURE 35°C - RELATIVE HUMIDITY 30% / WATER 40°C - 45°C</b>															
<b>COOLING CAPACITY</b>	<b>kW</b>	10.3	14.8	26.4	31.3	41.3	47.1	54.6	58.8	67	71.2	88.1	94.8	105.4	112.1
<b>SHR</b>	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>EER</b>	-	3.57	4.11	6.07	5.84	6.16	5.12	4.63	4.95	4.5	4.86	4.43	4.74	5.82	5.07
<b>TOTAL POWER INPUT</b>	<b>kW</b>	3.1	4	5.6	6.6	8.5	11	13.6	14.1	17.1	17.5	23.8	25	24	28
<b>AIR FLOW</b>	<b>m³/h</b>	2150	3700	8800			11720			14300		17500	19900	23700	25300
<b>POWER SUPPLY</b>	-	400/3+N/50													
<b>SOUND PRESSURE LEVEL at 2 meters free field</b>	<b>dB</b>	50	54	70		71	74	75		77		76			
<b>DIMENSIONS [LxHxD]</b>	<b>mm</b>	600 x1875 x600	900 x1875 x600	1010 x2000 x890		1270x2000x890			1760 x2000 x890		2020 x2000 x890		2510x2000x890		

Performance data relating to Downflow versions. | Also available with 60 Hz power supply. | Model height Displacement 2125 mm for sizes 0091-0131.

Алматы (7273)495-231  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижегород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://hiref.nt-rt.ru> || [hfb@nt-rt.ru](mailto:hfb@nt-rt.ru)